

Ampacoll® ND/ND.Band




▶ Nail sealing for roof membranes and formwork strips



- ▶ Easy installation
- ▶ Does not absorb water
- ▶ Optimal width – fits any counter batten
- ▶ Ideal for any roof pitch

Ampacoll® ND

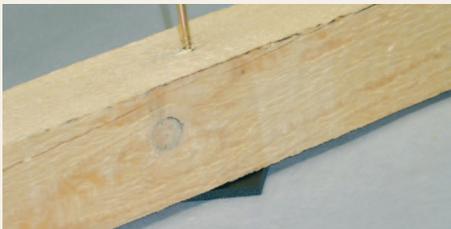

Roll dimensions

Length: 60 mm / Width: 40 mm / Thickness: 5 mm

Box contents

10 rolls, 500 pieces each roll

Pallet details

30 boxes

Ampacoll® ND.Band



Roll dimensions

Length: 30 m / Width: 60 mm / Thickness: 3 mm

Box contents

8 rolls = 240 m¹

Pallet details

18 boxes = 4'320 m¹

Technical details:


Storage time	2 years
Storage conditions	cool and dry
Working temperature	from -5 °C
Temperature resistance	-40 to +70 °C
Outdoor exposure time	4 months

10

Jahre Garantie*
Ans Garantie
Anni Garanzia
Years Warranty

* Security is part of the system at Ampack. We cover the cost of removal and replacement, and consequential damage, as well as the replacement materials.

ISO 9001:2008
Swiss Research

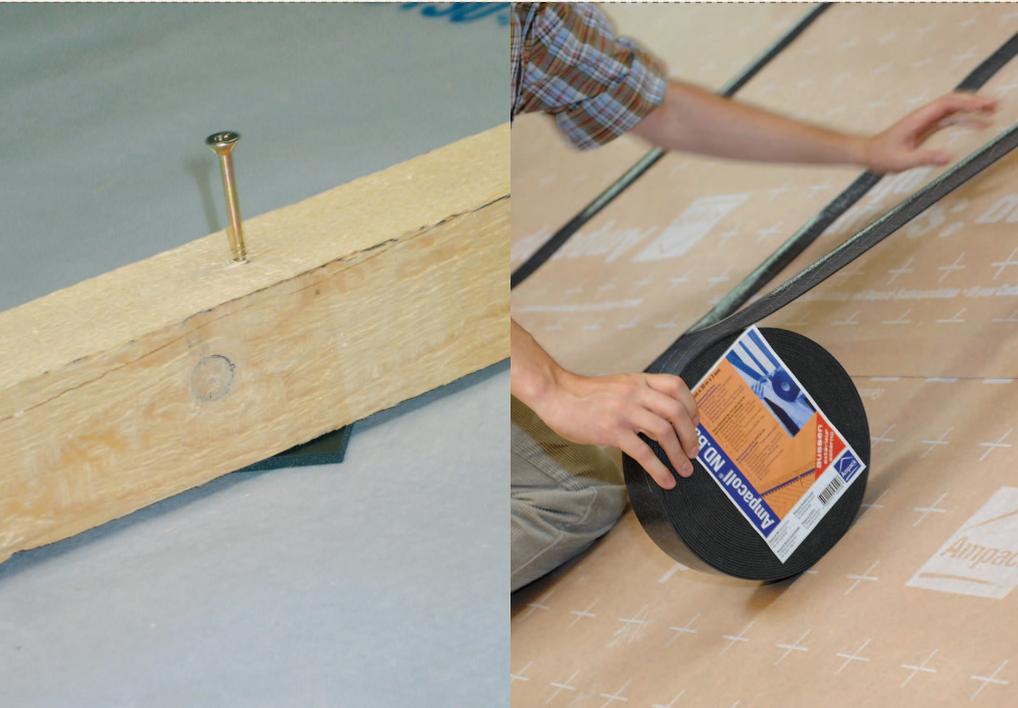

Optimized for use with the following materials:

- ▶ Roof membranes
- ▶ Tensioned/non-tensioned sub-membranes
- ▶ Formwork strips

The protective function of nail sealing

What use is the best roof support, when water can penetrate the screw or nail holes? **Ampacoll® ND** nail sealing guarantees a waterproof roof support. Twisted counter battens, shrinking wood, extreme alternating cycles of wet and dry, low contact pressure, poor adhesion of the nail in the rafters, mechanical loading from scaffolding or tile trestles, permanent snow coverings – these are all potential sources of damage!

Laying tips

Make a chalk mark with a piece of string for each counter batten and glue the **Ampacoll® ND / ND.Band** nail seal directly on the roof membrane to form a diamond shape. This ensures the water flows away much better! Then install the counter battens.

Ampack recommends

Counter battens are subject to extreme alternating cycles of wet and dry. For a better seal, screwing the battens on is preferable to nailing.